




GEO DEEP DOUBLE BATH DATA SHEET

The William Garvey 'Geo Deep Bath' is constructed from teak and specialist marine ply. Baths have two removable seats. The bath is designed to stand on two teak bearers which elevate the bath by 100mm (4"). The bath has a shaped base to improve drainage, but it should be leveled as accurately as possible. Large, non-standard baths require additional base supports which are supplied. A laminated teak stool is also supplied. All WGL products can be bespoke made to meet your specific project requirements.

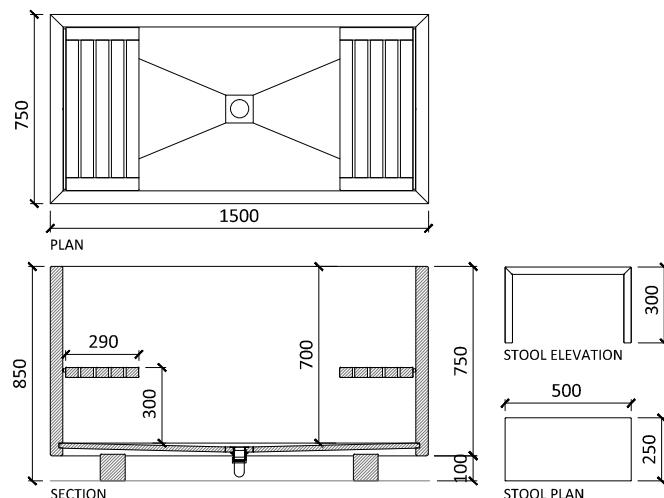

DEEP DOUBLE BATH		DIMENSIONS	
length	1500mm	59"	
width	750mm	29.5"	
height (excl.bearers)	750mm	29.5"	
internal length	1400mm	55"	
internal width	650mm	25.5"	
internal depth	700mm	27.5"	
wall thickness	50mm	2"	
weight (empty)	112kg	246.5 lbs	
weight (filled)	567kg	1247.5 lbs	
cubic capacity	637 litres	140 gall	
capacity (400mm deep)	364 litres	80 gall	
crated weight (long haul)	218.5kg	482 lbs	
crated weight (short haul, UK)	166.5kg	366.5 lbs	
crated size (long haul)	1710x960x1050mm	68x38x38"	
crated size (short haul, UK)	1550x760x780mm	61x30x30"	
stool	500x250x300mm	20x10x12"	

DESIGN CONSIDERATIONS

PLUMBING CONNECTIONS

- Geo deep baths are fitted with a standard 1 1/2" chrome captive bath waste (chainless) compatible with standard shallow bath traps. A standard plastic shallow 'P' trap is supplied fitted for 1 1/2" waste plumbing. The waste is fitted in the centre of the bath.
- Overflows are not fitted as standard. If you require an overflow, the bath can be customised to conceal overflow plumbing.
- Generally, taps are either wall or floor mounted, but baths can be customised to enable taps to be integrated

HOT WATER SUPPLY

- With greater cubic capacity, our baths use more hot water than conventional baths. A combi or geyser type boiler will provide a continuous flow of hot water whereas the capacity of a conventional system is limited by the size of the storage tank. Typically a combi type boiler is able to deliver 15.1 litres (4 US gallons) per minute at 35 degrees centigrade.

BESPOKE SIZES AVAILABLE

- Geo deep baths can be made to individual sizes..... Please contact us to discuss your specific requirements

CARE & MAINTENANCE

- All William Garvey teak work is finished with a specially formulated marine polish. It has exceptional adhesion to the timber, forming a tough layer which will not absorb stains and is easy to clean using ordinary non-abrasive bathroom and kitchen cleaners.
- Products containing bleach should be avoided as they will have a detrimental effect to the marine polish finish. Limescale removers can be used without the risk of damage.